



# Absolute E-Z Up Transport Dolly™ ACCESSORY

## BROCHURE

### THE PRACTICAL SOLUTION... & VALUE

TRANSPORT MORE INVENTORY IN A SINGLE TRIP!

#### LOSING TOO MUCH TIME ON THE JOB?

Whether it's from picking warehouse stock, transporting parts to shipping, or delivering components to workstations, lost time is lost business. Now you can save time and increase profits with the **Transport Dolly™**.

With a **440 lb.** tow capacity, the **Transport Dolly™** makes it possible to move more inventory, increasing productivity. At just 30" wide, an overall length of 68-3/4", and with a ground clearance of 8", the Transport Dolly can be easily maneuvered around nearly any jobsite.



#### TRANSPORT NEARLY TWICE THE LOAD CAPACITY IN ONE TRIP

The **Transport Dolly™** is compatible with the **AEUP ISP-11™** industrial stock picker. Combined with the ISP-11's... (Powered Material Tray- **198 lb.** capacity) and the (Cargo Transport Hood- **249 lb.** capacity), operators can now move **890 lbs.** of material or inventory in one trip.



*Once again,  
Absolute E-Z Up® leads the way  
with safe, practical and  
innovative solution that reduces  
both time and labor, WHILE  
increasing productivity returns.*



Transport Dolly  
Capacity: 440 lbs.



ISP-11 Transport Hood  
Capacity: 249 lbs.



ISP-11 Powered  
Material Tray  
Capacity: 198 lbs.



ISP-11 Operator Bay  
Capacity: 249 lbs.



Eco-Friendly



# Absolute E-Z Up Transport Dolly™

Designed by Absolute E-Z Up. Manufactured in the USA.

| TECHNICAL DATA                                 |   | Imperial           | Metric     |
|--|---|--------------------|------------|
| Dolly Height from Floor                        | A | 30"                | 762 mm     |
| Dolly Width                                    | B | 30"                | 762 mm     |
| Dolly Length (with Tow Bar)                    | C | 68.8"              | 1,745.2 mm |
| Dolly Length (w/out Tow Bar)                   | D | 46"                | 1,168.4 mm |
| Ground Clearance                               | E | 8"                 | 203.2 mm   |
| Unit Weight                                    |   | 100 lbs.           | 45.4 kg    |
| PERFORMANCE                                    |   |                    |            |
| Capacity                                       |   | 440 lbs.           | 200 kg     |
| Front Swivel Casters (2" non-marking)          |   | 6"                 | 152 mm     |
| Rear Fixed Wheels (2" non-marking)             |   | 6"                 | 152 mm     |
| Tow Bar-<br><i>w/Spring-mounted Attachment</i> |   | 440 lbs.           | 199.5 kg   |
| WARRANTY                                       |   | 6- Months on Parts |            |




## DURABLE CONSTRUCTION

Constructed with high-grade steel and powder-coated paint, and featuring a diamond-plated floor, the **Transport Dolly™** is built to withstand even the most demanding work sites.

The sidewalls are constructed of steel wire mesh with 1-2" square openings with a steel top band to withstand years of use.

## EASY TO USE

With its quick connect/disconnect system and safety coupler, the Transport Dolly is designed for easy - and safe - use.

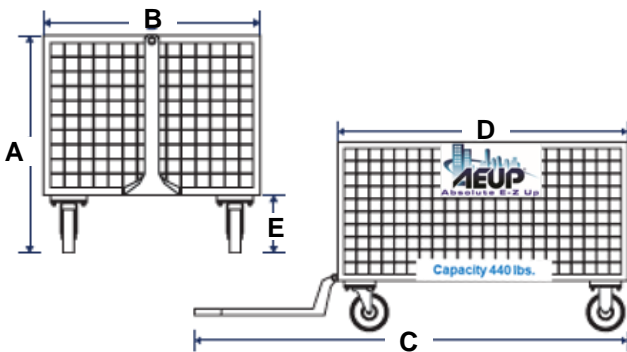

## VERSATILE TRANSPORT CAPABILITIES: Total- 1,174 lbs.



1. ISP-11 POWERED MATERIAL TRAY, (198 lbs.)
2. ISP-11 TRANSPORT HOOD (249 LBS.)
3. ISP-11 OPERATOR BAY (287 LBS.)
4. TRANSPORT DOLLY (440 LBS.).

Lean Inc. | Warehouse IQ  
1950 West Corporate Way,  
PMB 12217  
Anaheim, CA, 92801

T: (888) 310-0008 x2  
E: [info@think-lean.com](mailto:info@think-lean.com)  
W: <http://leanmh.com>

Distributed By:

**LEAN  
INC**  
warehouse<sup>IQ</sup>

In an ongoing effort to improve product, specifications are subject to change without notice. Photos and drawings are for illustrative purposes only.