



Low Level Access



ISP-11

INDUSTRIAL STOCK PICKER

BROCHURE

**MAKING WORK SAFER, FASTER, EASIER...
MORE PRODUCTIVE**



**For
Elevated
Performance...**

THE IDEAL SOLUTION...

**FOR MANAGING INVENTORY, FACILITY MAINTENANCE,
STOCK-PICKING, TRANSPORTING SUPPLIES & PERSONNEL**



Unit Transport Capacity:
734 lbs. or 1,174 lbs. w/
optional Transport Dolly



Gradeability:
35%




Travel Speed:
3.1 mph



Turning Radius
Inside: Zero



Eco-Friendly

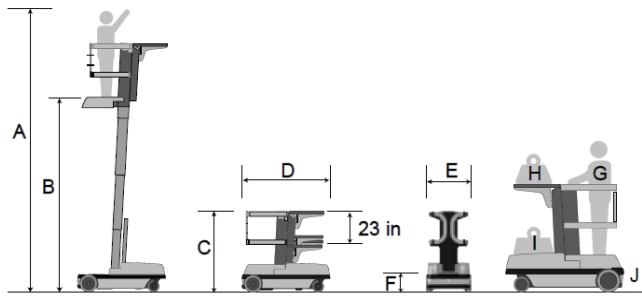

Manufacturer 5-2-1 Platinum Warranty
The BEST in the industry!

TECHNICAL DATA		Imperial	Metric
Max. Working Height	A	17' 6"	5350 mm
Max. Platform Height	B	11'	3350 mm
Unit Height- Stowed	C	55"	1441 mm
Unit Length- Stowed	D	57"	1500 mm
Unit Width	E	31.8"	808 mm
Platform Entry Height	F	14"	356 mm
Occupants	One		
Unit Gross Weight		1,455 lbs.	660 kg
Drive Speed- Stowed*		3.1 mph	5 km/h
Drive Speed- Raised		0.74 mph	1.2 km/h
Gradeability	35%		
Inside Turning Radius	Zero		
Outside Turning Radius	5' 2"	1600 mm	
Raise / Lower Speed	18 / 14 sec		
Driving System	Two-handed Proportional		
Tires	Non-marking		
Tilt Sensor	Standard		
CAPACITIES			
Operator's Bay	G	287 lbs.	130 kg
Powered Material Tray	H	198 lbs.	90 kg
Transport Hood	I	249 lbs.	113 kg
Optional Transport Dolly	J	440 lbs.	199.5 kg
POWER			
Batteries	(4) 6V, 245 Ah, Lead Acid		
Power	24V c.c.		
Load Network Power	110 / 220V c.a.		
Duty Cycle- Drive & Time (on a single charge)	9+ hours, approx. 17 miles (28 km)		
Warranty	(5-2-1 Yr) (Optional- 10-5-1 Yr)		



Maintenance-Free Hydraulic Mast

- Features no chains or wearable parts to inspect or maintain.
- Easy Accessibility to components if needed.



Model Highlights

- Ultra-Compact Design
- Fully Proportional Lift & Drive
- Non-marking Solid Tires
- Simple, Easy Charging
- Fast and Efficient Serviceability
- Easy Platform Access with Low Entry / Exit Step

Model Options

- ✓ 24V, 245 Ah AGM Batteries
- ✓ Side Glide Base Roller Set
- ✓ Gate Interlock
- ✓ Wheel Lock
- ✓ Transport Dolly

Versatile Transport Capabilities: Total 1,174 lbs.



- 1. POWERED MATERIAL TRAY** (198 lbs.)
 . Can be easily raised or lowered
 . at the touch of a button.)
- 2. TRANSPORT HOOD** (249 lbs.)
- 3. OPERATOR BAY** (287 lbs.)
- 4. OPTIONAL TRANSPORT DOLLY** (440 lbs.)



SAFETY FIRST

Equipped with both front & back LED travel lights and motion alarm.




SAFETY SENSORS

DUAL PETAL AND HAND CONTROL
 Activates when in hands & feet are in sync. The operator can then operate any of the drive / lifting / lowering functions.



GROUND CONTROL PANEL

Automatic diagnostic control system - detects any malfunction that may occur.



HIGH IMPACT-RESISTANT COVERS

Protects against shocks and damages caused by falling debris.

Lean Inc. | Warehouse IQ
 1950 West Corporate Way,
 PMB 12217
 Anaheim, CA, 92801

T: (888) 310-0008 x2
 E: info@think-lean.com
 W: http://leanmh.com

Distributed By:



In an ongoing effort to improve product, specifications are subject to change without notice. Photos and drawings are for illustrative purposes only.